


KWVE25-B-SNL [🔗](#)

循环球轴承滑块


滑块 KWVE..-B-SNL, 窄低长型滑块, 四列

技术信息

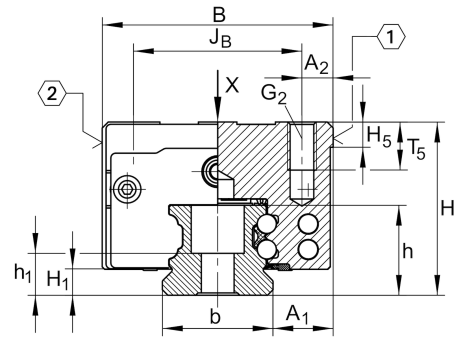

主要尺寸和性能数据

H	31 mm	height system
B	48 mm	width carriage
L	109.1 mm	overall length carriage
C	23,400 N	dynamic load rating
C ₀	54,000 N	static load rating
M _{0x}	745 Nm	static moment rating about X axis
M _{0y}	825 Nm	static moment rating about Y axis
M _{0z}	825 Nm	static moment rating about Z axis
≈m	0.62 kg	重量

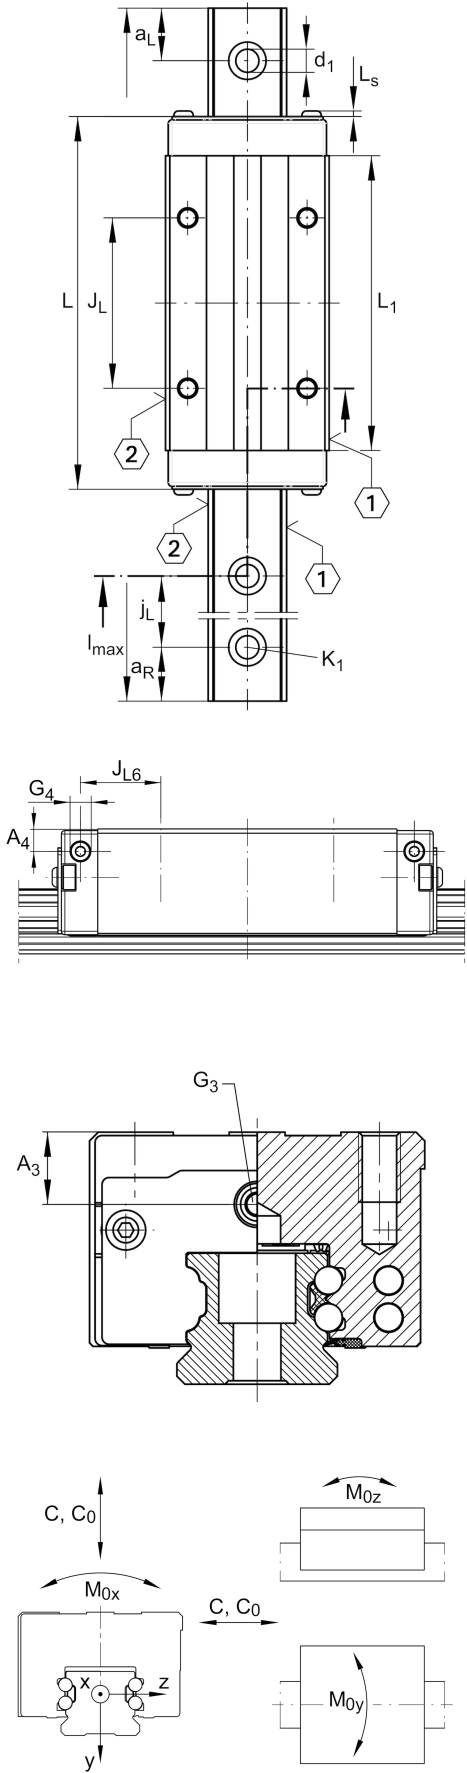

安装尺寸

A ₁	12.5 mm	Distance from locating edge on carriage to locating edge on guideway
J _B	35 mm	
b	23 mm	width rail
A ₂	6.5 mm	Distance from locating edge to hole
L ₁	86.5 mm	
L _S	1.65 mm	
J _L	50 mm	
H ₁	5.1 mm	Free space, system dimension
H ₅	5.25 mm	
T ₅	7.5 mm	Thread depth
G ₂	M6	fixing screws above (DIN ISO 4762-12.9)
G ₂ M _A	17 Nm	maximum tightening torque
A ₃	6 mm	position lubrication connector
G ₃	M6	lubrication connector
t G ₃	7 mm	maximum permissible screw depth for lubrication connectors
A ₄	4 mm	position lubrication connector
G ₄	M3	lubrication connector
t G ₄	6 mm	maximum permissible screw depth for lubrication connectors
J _{L6}	22.5 mm	position lubrication connector

附加信息

VMKB_065	KWVE	Material name
----------	------	---------------

