


KWVE25-B-L

循环球轴承滑块

滑块 KWVE..-B-L, 长型滑块, 四列, 满装滚珠

技术信息

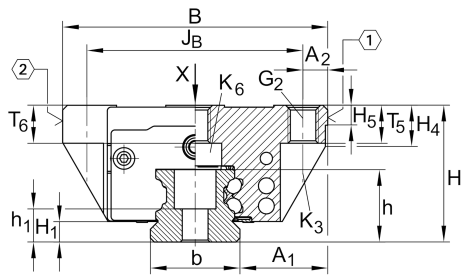


主要尺寸和性能数据

H	36 mm	height system
B	70 mm	width carriage
L	109.1 mm	overall length carriage
C	23,400 N	dynamic load rating
C ₀	54,000 N	static load rating
M _{0x}	745 Nm	static moment rating about X axis
M _{0y}	825 Nm	static moment rating about Y axis
M _{0z}	825 Nm	static moment rating about Z axis
≈m	1 kg	重量



安装尺寸

A_1	23.5 mm	Distance from locating edge on carriage to locating edge on guideway
J_B	57 mm	
b	23 mm	width rail
A_2	6.5 mm	Distance from locating edge to hole
L_1	86.5 mm	
L_S	1.65 mm	
J_L	45 mm	
J_{LZ}	40 mm	
H_1	5.1 mm	Free space, system dimension
H_4	10.9 mm	
H_5	5.25 mm	
T_5	10 mm	Thread depth
T_6	10 mm	
G_2	M8	fixing screws above (DIN ISO 4762-12.9)
$G_2 M_A$	24 Nm	maximum tightening torque
K_3	M6	fixing screws below (DIN ISO 4762-12.9)
$K_3 M_A$	17 Nm	maximum tightening torque
K_6	M6	fixing screws below (DIN ISO 4762-12.9)
$K_6 M_A$	17 Nm	maximum tightening torque
D_2	6.7 mm	
A_3	11 mm	position lubrication connector
G_3	M6	lubrication connector
t_{G_3}	7 mm	maximum permissible screw depth for lubrication connectors
A_4	6.5 mm	position lubrication connector
G_4	M6	lubrication connector
t_{G_4}	7 mm	maximum permissible screw depth for lubrication connectors
J_{L6}	25.75 mm	position lubrication connector

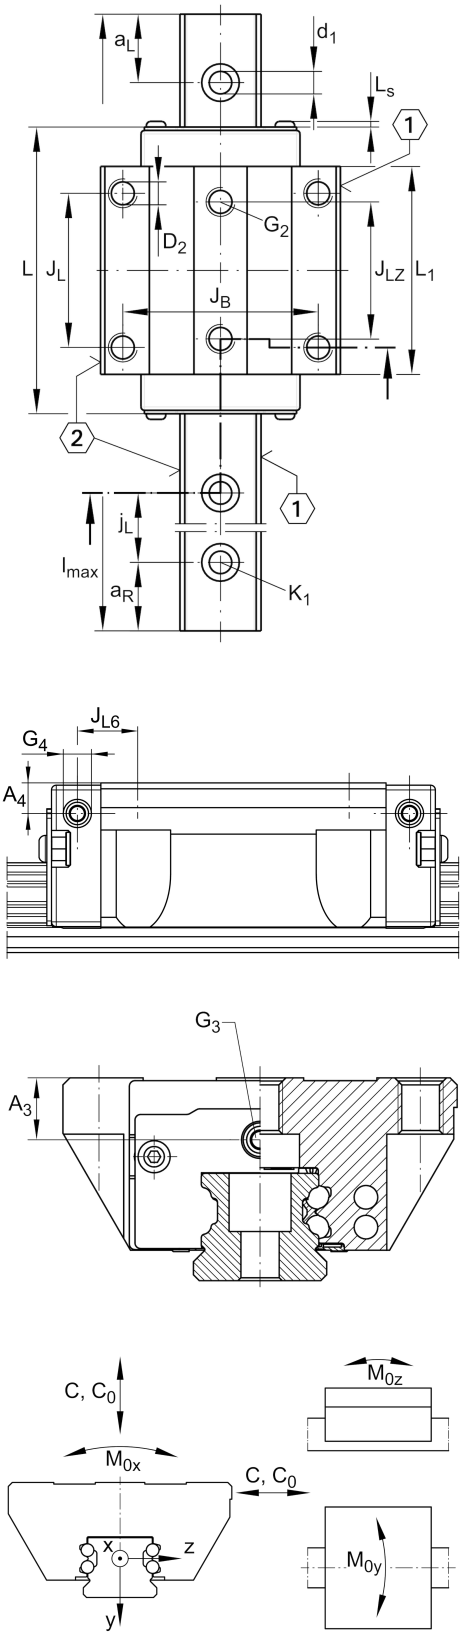



附加信息

VMKB_065	KWVE	Material name
----------	------	---------------

