


**KWVE35-B-E**

循环球轴承滑块

滑块 KWVE..-B-E, 标准滑块, 四列, 满装, 扩展型

技术信息

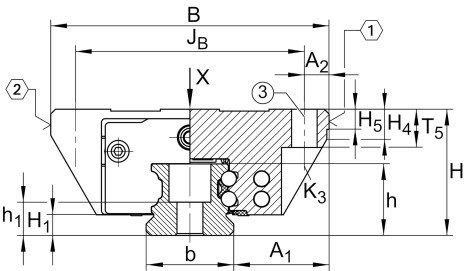

主要尺寸和性能数据

|                 |          |                                   |
|-----------------|----------|-----------------------------------|
| H               | 48 mm    | height system                     |
| B               | 100 mm   | width carriage                    |
| L               | 112 mm   | overall length carriage           |
| C               | 38,000 N | dynamic load rating               |
| C <sub>0</sub>  | 72,000 N | static load rating                |
| M <sub>0x</sub> | 1,465 Nm | static moment rating about X axis |
| M <sub>0y</sub> | 1,020 Nm | static moment rating about Y axis |
| M <sub>0z</sub> | 1,020 Nm | static moment rating about Z axis |
| ≈m              | 1.75 kg  | 重量                                |



安装尺寸

|           |         |                                                                      |
|-----------|---------|----------------------------------------------------------------------|
| $A_1$     | 33 mm   | Distance from locating edge on carriage to locating edge on guideway |
| $J_B$     | 82 mm   |                                                                      |
| $b$       | 34 mm   | width rail                                                           |
| $A_2$     | 9 mm    | Distance from locating edge to hole                                  |
| $L_1$     | 80 mm   |                                                                      |
| $L_S$     | 1.65 mm |                                                                      |
| $J_L$     | 50 mm   |                                                                      |
| $H_1$     | 6.7 mm  | Free space, system dimension                                         |
| $H_4$     | 14.3 mm |                                                                      |
| $H_5$     | 6.75 mm |                                                                      |
| $T_5$     | 13 mm   | Thread depth                                                         |
| $K_3$     | M8      | fixing screws below (DIN ISO 4762-12.9)                              |
| $K3 M_A$  | 41 Nm   | maximum tightening torque                                            |
| $D_2$     | 8.6 mm  |                                                                      |
| $A_3$     | 12.3 mm | position lubrication connector                                       |
| $G_3$     | M6      | lubrication connector                                                |
| $t_{G_3}$ | 7 mm    | maximum permissible screw depth for lubrication connectors           |
| $A_4$     | 11 mm   | position lubrication connector                                       |
| $G_4$     | M6      | lubrication connector                                                |
| $t_{G_4}$ | 7 mm    | maximum permissible screw depth for lubrication connectors           |
| $J_{L6}$  | 22 mm   | position lubrication connector                                       |

附加信息

|          |      |               |
|----------|------|---------------|
| VMKB_065 | KWVE | Material name |
|----------|------|---------------|

