


KWVE45-B-SL

循环球轴承滑块


滑块 KWVE..-B-SL, 窄长型滑块, 四列

技术信息

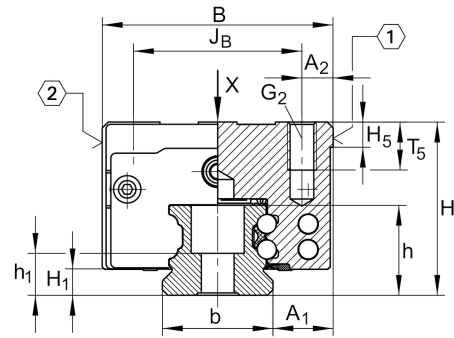

主要尺寸和性能数据

H	60 mm	height system
B	86 mm	width carriage
L	172.7 mm	overall length carriage
C	82,000 N	dynamic load rating
C ₀	181,000 N	static load rating
M _{0x}	4,635 Nm	static moment rating about X axis
M _{0y}	4,000 Nm	static moment rating about Y axis
M _{0z}	4,000 Nm	static moment rating about Z axis
≈m	3.38 kg	重量

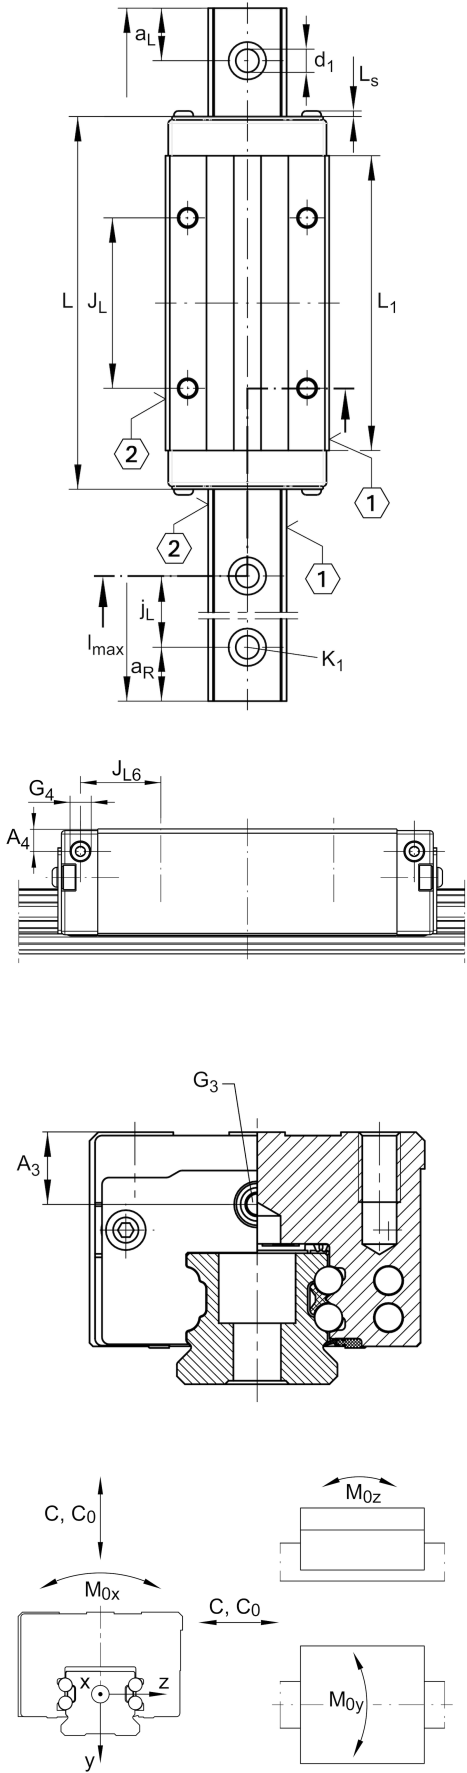

安装尺寸

A ₁	20.5 mm	Distance from locating edge on carriage to locating edge on guideway
J _B	60 mm	
b	45 mm	width rail
A ₂	13 mm	Distance from locating edge to hole
L ₁	134.6 mm	
L _S	2.2 mm	
J _L	80 mm	
H ₁	9.7 mm	Free space, system dimension
H ₅	9.25 mm	
T ₅	17 mm	Thread depth
G ₂	M10	fixing screws above (DIN ISO 4762-12.9)
G ₂ M _A	83 Nm	maximum tightening torque
A ₃	16.5 mm	position lubrication connector
G ₃	M6	lubrication connector
t G ₃	7 mm	maximum permissible screw depth for lubrication connectors
A ₄	16.5 mm	position lubrication connector
G ₄	M6	lubrication connector
t G ₄	7 mm	maximum permissible screw depth for lubrication connectors
J _{L6}	35.3 mm	position lubrication connector

附加信息

VMKB_065	KWVE	Material name
----------	------	---------------

