


KWVE35-B-H [↗](#)

循环球轴承滑块


滑块 KWVE...-B-H, 高窄型滑块, 四列

技术信息

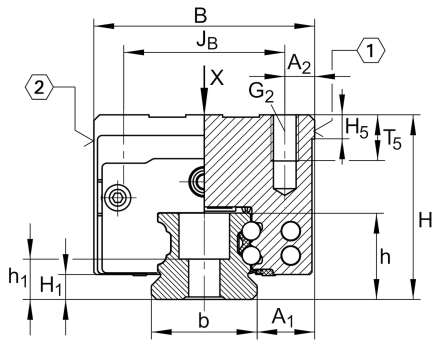

主要尺寸和性能数据

H	55 mm	height system
B	70 mm	width carriage
L	112 mm	overall length carriage
C	38,000 N	dynamic load rating
C ₀	72,000 N	static load rating
M _{0x}	1,465 Nm	static moment rating about X axis
M _{0y}	1,020 Nm	static moment rating about Y axis
M _{0z}	1,020 Nm	static moment rating about Z axis
≈m	1.71 kg	重量

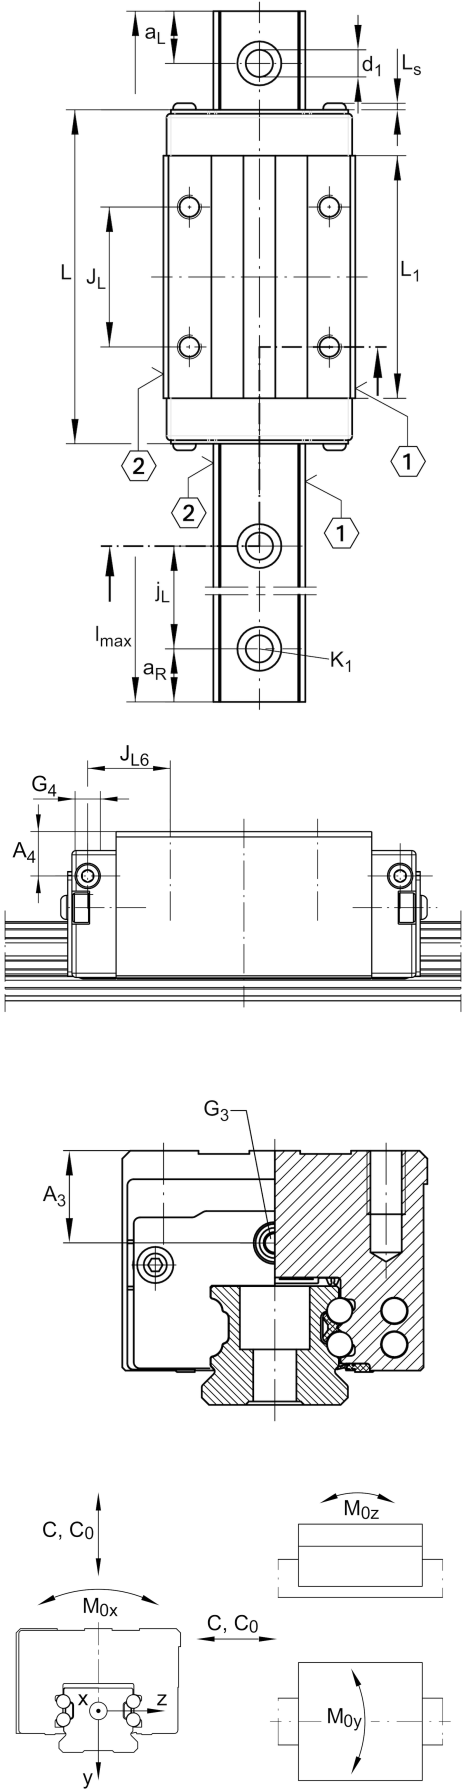

安装尺寸

A ₁	18 mm	Distance from locating edge on carriage to locating edge on guideway
J _B	50 mm	
b	34 mm	width rail
A ₂	10 mm	Distance from locating edge to hole
L ₁	80 mm	
L _S	1.65 mm	
J _L	50 mm	
H ₅	6.75 mm	
T ₅	13.5 mm	Thread depth
G ₂	M8	fixing screws above (DIN ISO 4762-12.9)
G ₂ M _A	41 Nm	maximum tightening torque
A ₃	19.3 mm	position lubrication connector
G ₃	M6	lubrication connector
t G ₃	7 mm	maximum permissible screw depth for lubrication connectors
A ₄	18 mm	position lubrication connector
G ₄	M6	lubrication connector
t G ₄	7 mm	maximum permissible screw depth for lubrication connectors
J _{L6}	22 mm	position lubrication connector

附加信息

VMKB_065	KWVE	Material name
----------	------	---------------

