


KWSE25-HL [↗](#)

循环球轴承滑块

六列直线循环滚珠轴承和导轨组件的高窄长滑块

X-life

技术信息

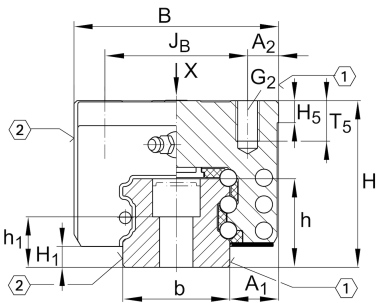

主要尺寸和性能数据

H	40 mm	height system
B	48 mm	width carriage
L	104.3 mm	overall length carriage
I C	35,300 N	dynamic load rating, load direction I: compressive load
I C ₀	93,700 N	static load rating, load direction I: compressive load
II C	33,000 N	dynamic load rating, load direction II: tensile load
II C ₀	62,000 N	static load rating, load direction II: tensile load
III C	35,000 N	dynamic load rating; basic dynamic load rating, Load direction III: lateral load
III C ₀	65,000 N	static load rating, Load direction III: lateral load
≈m	0.7 kg	重量







安装尺寸

A_1	12.5 mm	Distance from locating edge on carriage to locating edge on guideway
J_B	35 mm	
b	23 mm	width rail
A_2	6.5 mm	Distance from locating edge to hole
L_1	83.4 mm	
J_L	50 mm	
H_1	5.2 mm	Free space, system dimension
H_5	5 mm	
T_5	10 mm	Thread depth
G_2	M6	fixing screws below (DIN ISO 4762-12.9)
$G_2 M_A$	17 Nm	maximum tightening torque
N_2	3 mm	max. diameter of lubrication hole in adjacent construction
J_{L5}	21.69 mm	position lubrication connector
A_3	10 mm	position lubrication connector
$t A_3$	7 mm	maximum permissible screw depth for lubrication connectors
O	3x1,5	O-Ring DIN 3771
M_{0x}	1,160 Nm	Moment
M_{0y}	930 Nm	Moment
M_{0z}	830 Nm	Moment

附加信息

VMKB_065	KWSE	Material name
----------	------	---------------

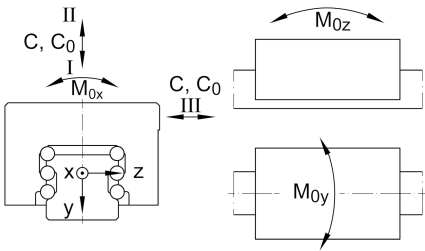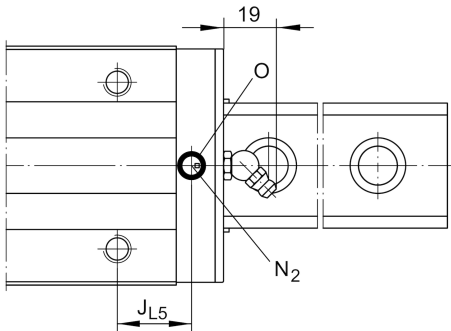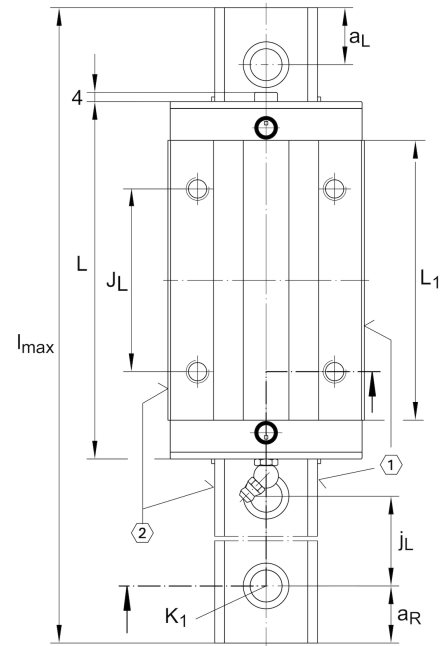



在 medias 上檢視產品詳細資料

23.10.2024, 09:14:17 CST

SCHAEFFLER

