




TSX35-E-ADE [🔗](#)
修形轨道

技术信息

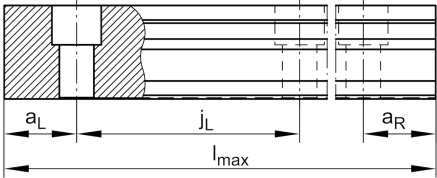

主要尺寸和性能数据



h	30 mm	Height
b	34 mm	Width
Tol b	-0.005 mm	Upper tolerance
Tol b	-0.035 mm	Lower tolerance
≈m	5.9 kg/m	重量

安装尺寸

K ₁	M8	Fixing screws (DIN ISO 4762-12.9)
d ₁	9 mm	bore diameter
K1 M _A	41 Nm	Tightening torque


尺寸

l _{max}	6,000 mm	Max length single piece guideway
a _{L min}	20 mm	Distance
a _{L max}	31 mm	Distance
a _{R min}	20 mm	Distance
a _{R max}	31 mm	Distance
j _L	40 mm	Increment
h ₁	17.5 mm	Length
Tol h ₁	0.5 mm	Upper tolerance
Tol h ₁	-0.5 mm	Lower tolerance
h ₂	1.1 mm	Depth
b ₁	17 mm	Width
d _{ADB}	3.9 mm	Bore diameter
s	0.6 mm	Thickness

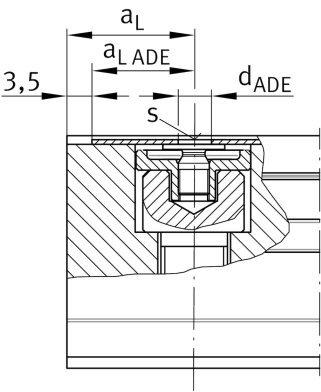



附加信息



RWU35-E-...; RWU35-F-...	usable carriage(s)
RUE35-E-...; RUE35-F-...	Usable linear systems